

COXREELS® 1195 Series motor driven hose reels are designed to handle long lengths of large diameter hose for increased volume delivery. Coxreels' exclusive low profile outlet riser and open drum design provide a noncrimping, flat smooth hose wrap. The sturdy all welded "A" frame base provides exceptional strength to handle the extra weight without sacrificing performance, even in demanding mobile applications.

1195 SERIES

- ALL REELS SUPPLIED LESS HOSE

| MODEL | LESS HOSE | | | | | | | | | | SIZE INDEX |
|---|--------------|----------|-----|-----------------------------------|---------|-----|-----------------------|--------------|-------|------------|------------|
| | STANDARD CAP | | | OPTIONAL CAP. Reducer required | | | INLET SWIVEL ASSEMBLY | OUTLET RISER | PSI | APRX. LBS. | |
| | I.D. | O.D. | FT. | I.D. | O.D. | FT. | | | | | |
| STANDARD 1195 SERIES WITH IN-LINE SWIVEL | | | | | | | | | | | |
| 1195-932-X | 2" | 29 1/16" | 50 | 1 1/2" | 2 1/16" | 60 | 2" F NPT | 2" F NPT | 1,000 | 128 | 1 |
| 1195-1728-X | 2" | 29 1/16" | 60 | 1 1/2" | 2 1/16" | 85 | 2" F NPT | 2" F NPT | 1,000 | 134 | 2 |
| 1195-1332-X | 2" | 29 1/16" | 75 | 1 1/2" | 2 1/16" | 100 | 2" F NPT | 2" F NPT | 1,000 | 148 | 3 |
| 1195-2428-X | 2" | 29 1/16" | 90 | 1 1/2" | 2 1/16" | 135 | 2" F NPT | 2" F NPT | 1,000 | 169 | 4 |
| 1195-2032-X | 2" | 29 1/16" | 115 | 1 1/2" | 2 1/16" | 150 | 2" F NPT | 2" F NPT | 1,000 | 186 | 5 |
| 1195-3228-X | 2" | 29 1/16" | 125 | 1 1/2" | 2 1/16" | 175 | 2" F NPT | 2" F NPT | 1,000 | 218 | 6 |
| 1195 SERIES WITH 90° SWIVEL | | | | | | | | | | | |
| 1195-932-X-BUXX | 2" | 29 1/16" | 50 | 1 1/2" | 2 1/16" | 60 | 2" F NPT | 2" F NPT | 1,500 | 128 | 1 |
| 1195-1728-X-BUXX | 2" | 29 1/16" | 60 | 1 1/2" | 2 1/16" | 85 | 2" F NPT | 2" F NPT | 1,500 | 134 | 2 |
| 1195-1332-X-BUXX | 2" | 29 1/16" | 75 | 1 1/2" | 2 1/16" | 100 | 2" F NPT | 2" F NPT | 1,500 | 148 | 3 |
| 1195-2428-X-BUXX | 2" | 29 1/16" | 90 | 1 1/2" | 2 1/16" | 135 | 2" F NPT | 2" F NPT | 1,500 | 169 | 4 |
| 1195-2032-X-BUXX | 2" | 29 1/16" | 115 | 1 1/2" | 2 1/16" | 150 | 2" F NPT | 2" F NPT | 1,500 | 186 | 5 |
| 1195-3228-X-BUXX | 2" | 29 1/16" | 125 | 1 1/2" | 2 1/16" | 175 | 2" F NPT | 2" F NPT | 1,500 | 218 | 6 |

- SUFFIX "X" OPTIONS

These models are not available in direct hand crank models. When ordering, substitute the "X" with selection below. NOTE: Add 5 lbs to ship weight if reel is crated.

| SUFFIX | TYPE | DESCRIPTION | ADD ON APRX. LBS |
|-------------|---------------------------|--|------------------|
| AB | AIR - 6 VANE | CAST IRON AIR MOTOR | 8 |
| C | FRONT HAND CRANK | BEVEL GEARED CRANK | 3 |
| EDV3 | 12 V DC, 1/2 HP EXP. 1:3 | EXPLOSION PROOF, REVERSIBLE, IDLER | 26 |
| EBV3 | 24 V DC, 1/2 HP EXP. 1:3 | EXPLOSION PROOF, REVERSIBLE, IDLER | 26 |
| EAV3 | 115 V AC, 1/2 HP EXP. 1:3 | EXPLOSION PROOF REVERSIBLE AC RECTIFIED, IDLER | 26 |
| EJV3 | 230 V AC, 1/2 HP EXP. 1:3 | EXPLOSION PROOF REVERSIBLE AC RECTIFIED, IDLER | 26 |
| H | HYDRAULIC | END PORTED 9/16-18 UNF | 6 |


*Electric Rewind models are available without idler gears for use with electronic speed reducers, contact factory

REEL DIMENSIONS

Technical Data Sheets Available On Website

| SIZE INDEX | W | | | | H | L | X | Y | Ø | Dw |
|------------|---------|---------|------------|----------------|---------|-----|---------|---------|---------|---------|
| | CRANK | ELEC. | AIR / HYD. | -BUXX EQUIPPED | | | | | | |
| 1 | 17 7/8" | 22 1/8" | 19 3/8" | 23" | 33 1/4" | 32" | 15" | 25 5/8" | 15 1/2" | 9 1/2" |
| 2 | 25 7/8" | 30 1/8" | 27 3/8" | 31" | 30 1/4" | 28" | 23" | 24 1/2" | 15 1/2" | 17 1/2" |
| 3 | 21 7/8" | 26 1/8" | 23 3/8" | 27" | 33 1/4" | 32" | 19" | 25 5/8" | 15 1/2" | 13 1/2" |
| 4 | 32 3/8" | 36 5/8" | 33 3/8" | 37 1/2" | 30 1/4" | 28" | 29 1/2" | 24 1/2" | 15 1/2" | 24" |
| 5 | 28 3/8" | 32 5/8" | 29 7/8" | 33 1/2" | 33 1/4" | 32" | 25 1/2" | 25 5/8" | 15 1/2" | 20" |
| 6 | 40 3/8" | 44 5/8" | 41 7/8" | 45 1/2" | 30 1/4" | 28" | 37 1/2" | 24 1/2" | 15 1/2" | 32" |

Overall Dimensions Base Drum

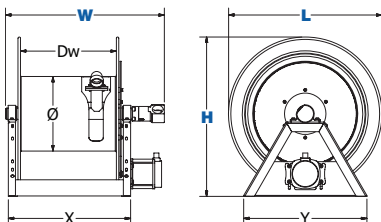

1195 SERIES :: REEL SPECIFICATIONS

SWIVEL

- In-line electroless nickel plated steel full-flow NPT swivel
- Swivel Seals: NITRILE
- (On high pressure models with suffix -BUXX) External fluid path with electroless nickel plated steel 90° full-flow NPT swivel
- (On high pressure models with suffix -BUXX) Swivel Seals: AFLAS
- Available with stainless steel fluid path

DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Robust lubricated horizontal surface mount bearings for easy rotation
- Adaptor for Victaulic connections available, consult factory

RETRACTION

- Reliable chain & sprocket drive on motor driven models
- Idler Gears on electric rewind models to reduce drum speed and increase torque. Default ratio: 1:3. Available in three sizes, consult factory.
- (On models with suffix -C) Bevel geared crank rewind See Motor Options Chart

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- High Volume Delivery
- Bulk Liquid Handling
- Water Trucks
- Mining Operations
- Construction Sites
- Farming
- Chemical Fluid Transfer
- Aviation Refueling
- Fuel Trucks

ACCESSORIZE YOUR REEL :: PG 56

- O-Rings & Swivels
- Roller Brackets
- Assorted Reel Accessories
- Hoses
- Brake



WARNING: Cancer and reproductive Harm – See page 63 for more information – www.P65Warning.ca.gov

