

**HOSE, CORD & CABLE REELS**

# **POWER TRANSMISSION**

**COXREELS SINCE 1923**



**INDUSTRY CATALOG**

# POWER TRANSMISSION REELS



**IT'S NOT JUST A LABEL,  
IT'S A BADGE OF HONOR**

Hose, cord, and cable reels are crucial in the power transmission industry when it comes to installing and maintaining machinery, electric lines and transformers as well as telecommunication line management systems.

## ***The Recognized Industry Leader***

Coxreels is wholesale only since 1923. Our product is made to high standards, supplying industrial grade product to distributors and OEMs worldwide. We are recognized as the leader in the reeling industry. We have been providing the most complete and diverse line of hose, cord, and cable reels for 10 decades!

## ***The Most Complete Line of Power Transmission Reels in the Market***

Our industrial-grade reels have been designed, engineered, and tested over time to withstand arduous conditions in the power industry and are built tough for longevity. There is an abundance of risks (i.e. high voltage, climbing utility poles, etc.) inherent within the industry – do not let trip hazards add to that risk.

## ***Proven reeling solutions to service vehicle needs!***

We have the most complete line of power transmission reels in the market. With numerous models and configurations to choose from, we have a reeling solution to meet the demands and durability you need to get the job done:

- Temporary Power / Light Source
- Hydraulic Tools / Powerline Cutters
- Coal, Natural Gas, Nuclear, wind, Hydroelectric, Petroleum Industries
- Electrical Engineer / Electrician Tool
- Telecommunications / Cellphone Providers
- Power, Hydraulic, and Pneumatic Tools
- Construction Sites
- Welding (Arc / Gas)

Our versatile and wide reel selection handles various capacities and comes in different sizes to suit any service vehicle requirement. Our standard reeling devices suggested in this catalog are already specified to meet the needs of the utility and service markets. Coxreels also has the engineering power to design and build custom reels, so please consult the factory if you cannot locate a reel that will work with your equipment, we will be happy to assist you with a solution.

***VALUE THE DIFFERENCE...***

***Make COXREELS your reel choice!***

# PROFESSIONAL GRADE FEATURES

## A HIGHER LEVEL OF STANDARDS



### CPC™ POWDER COAT

Our blue powder coat finish is long lasting, chip resistant & rust inhibiting




### BRASS SWIVEL

External fluid path, machined from solid brass, full flow, swivel for simple seal maintenance



### STEEL AXLE

1" solid steel axle & lubricated bearings for extra strength & durability. Not a hollow tube & no fluid travels through it



### STEEL CONSTRUCTION

High-Quality steel construction provides superior strength and durability for heavy-duty applications in commercial and industrial settings



### COMPONENT COVER

External CPC powder coated steel components cover for simple slip ring routine maintenance



### EZ-COIL® SERIES

A patented safety system that retracts up to 80% slower than conventional reels




### CNC SPUN DISCS

All steel rolled edges & ribbed discs for added safety, strength & durability



### CARTRIDGE MOTOR

Enclosed factory tuned & matched cartridge style motor for safe & easy replacement



### LOW PROFILE RISER

Low profile riser with open drum slot allows for smooth even hose wraps that will not pinch or bind your hose. **NO HUMP!**



### ALL WELDED STEEL "A" FRAME

All welded steel "A" frame for strength & durability. **NOT BOLTED!**




### 2 YEAR WARRANTY

Coxreels proudly stands behind our reels as they are built to last!



### USA MADE, QUALITY & SUPPORT

We take great pride in designing, building & supplying the world's finest reels made right here in the U.S.A.

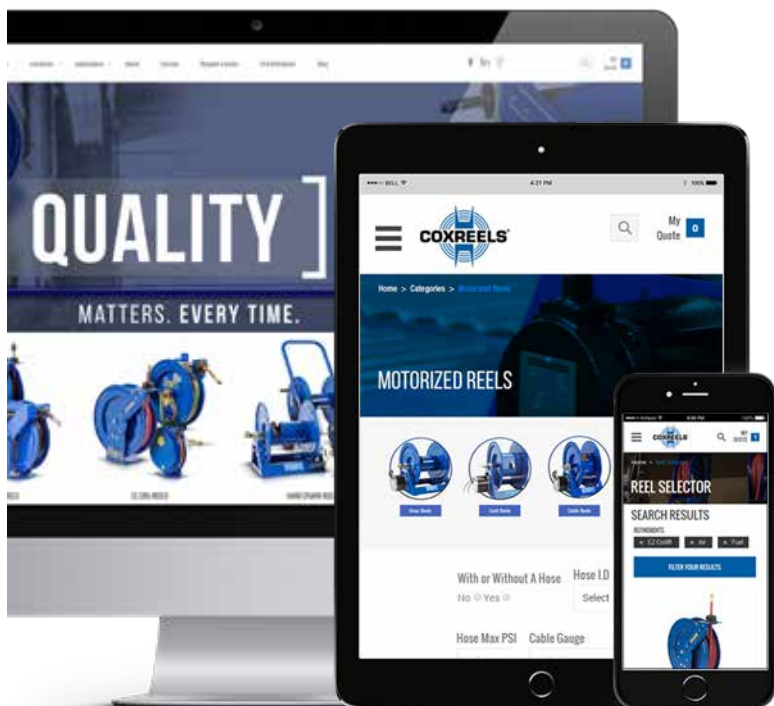

## VISIT US ONLINE

Coxreels is committed to providing our customers with the ultimate online experience as they navigate through the most complete and diverse line of hose, cord, and cable reels.

We hope that you enjoy the fresh look and feel of our updated website and find that this portal serves as a valuable resource for you!

FOLLOW US



# P SERIES

## PERFORMANCE HOSE REELS



**COXREELS® P Series "Performance" spring driven hose reels have a long history of dependability and trouble free performance.** Their compact space-saving size and heavy duty construction make them highly versatile and virtually indestructible. Time-tested proven components, superior design and craftsmanship have contributed to it's worldwide reputation as the most trusted hose reel.

### P SERIES

Do not exceed listed hose O.D. to obtain maximum length.

HOSE						LESS HOSE		SIZE INDEX	
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.		
<b>LOW PRESSURE</b>						Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.			
<b>P-LP-125</b>	1/4"	1/2"	25	300	27	<b>EZ-P-LP-125</b>	<b>P-LPL-125</b>	24	<b>1</b>
<b>P-LP-150</b>	1/4"	1/2"	50	300	40	<b>EZ-P-LP-150</b>	<b>P-LPL-150</b>	35	<b>3</b>
<b>P-LP-325</b>	3/8"	5/8"	25	300	28	<b>EZ-P-LP-325</b>	<b>P-LPL-325</b>	25	<b>2</b>
<b>P-LP-350</b>	3/8"	5/8"	50	300	43	<b>EZ-P-LP-350</b>	<b>P-LPL-350</b>	36	<b>3</b>
<b>P-LP-425</b>	1/2"	3/4"	25	300	44	-	<b>P-LPL-425</b>	39	<b>4</b>
<b>P-LP-450</b>	1/2"	3/4"	50	300	48	<b>EZ-P-LP-450</b>	<b>P-LPL-450</b>	43	<b>4</b>
<b>MEDIUM PRESSURE</b>						Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum Temperature 212°F (if used with water, synthetic fluids 135°F max.)			
<b>P-MP-320</b>	3/8"	1 1/16"	20	3,000	46	-	<b>P-MPL-320</b>	41	<b>4</b>
<b>P-MP-325</b>	3/8"	1 1/16"	25	3,000	49	-	<b>P-MPL-325</b>	42	<b>4</b>
<b>P-MP-420</b>	1/2"	1 3/16"	20	2,500	47	-	<b>P-MPL-420</b>	41	<b>4</b>
<b>P-MP-425</b>	1/2"	1 3/16"	25	2,500	49	<b>EZ-P-MP-425</b>	<b>P-MPL-425</b>	42	<b>4</b>
<b>HIGH PRESSURE</b>						Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum Temperature 212°F. (if used with water, synthetic fluids 135°F max.)			
<b>P-HP-120</b>	1/4"	9/16"	20	5,000	46	-	<b>P-HPL-120</b>	41	<b>4</b>
<b>P-HP-125</b>	1/4"	9/16"	25	5,000	48	<b>EZ-P-HP-125</b>	<b>P-HPL-125</b>	42	<b>4</b>
<b>P-HP-130</b>	1/4"	9/16"	30	5,000	50	-	<b>P-HPL-130</b>	43	<b>4</b>
<b>P-HP-320</b>	3/8"	1 1/16"	20	4,000	47	-	<b>P-HPL-320</b>	41	<b>4</b>
<b>P-HP-325</b>	3/8"	1 1/16"	25	4,000	49	<b>EZ-P-HP-325</b>	<b>P-HPL-325</b>	42	<b>4</b>
<b>P-HP-330</b>	3/8"	1 1/16"	30	4,000	51	-	<b>P-HPL-330</b>	43	<b>4</b>

To order EZ-Coil® equipped models less hose, please add prefix "EZ-"

### P SERIES REEL SPECIFICATIONS

#### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

#### DESIGN & STRUCTURE


- Sturdy single pedestal reel with space saving design facilitates workplace organization
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Controlled retraction speed up to 80% slower on EZ-COIL models
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	5 7/8"	14 7/8"	13 1/2"	5"	6"	3"	5"
2	6 1/2"	14 7/8"	13 1/2"	5"	6"	3"	5"
3	6 3/4"	18 5/8"	17 1/8"	6"	6"	4"	5"
4	7"	18 5/8"	17 1/8"	6"	6"	4"	5"

Overall Dimensions      Base      Mounting Pattern



WARNING: Cancer and reproductive Harm – See [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov) for more information

### TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 14 FOR ADDITIONAL ACCESSORIES



#### ORDER EZ-COIL® MODELS

EZ-Coil® is a patented controlled retraction technology offered exclusively on Coxreels' Safety Series reels. It retracts up to 80% slower than conventional reels, resulting in workplace safety, protection from injury & costly property damage.

#### UPGRADE TO NITRILE OR RUBBER HOSE

**NITRILE HOSE:** Premium high quality, oil resistant, multi-purpose hose. The high tensile spiral synthetic yarn reinforcement provides excellent kink resistance. Temperature range: -20° F to +212° F.

**SYNTHETIC RUBBER HOSE:** Versatile general purpose hose. The synthetic rubber tube and cover resists heat, sunlight, ozone, and weathering. Temperature range -40° F to +212° F

#### UPGRADE TO STAINLESS STEEL SWIVEL

Based on the upgraded medium pressure swivel, the stainless steel swivel is machined from solid 316 stainless steel and features increased wall thicknesses with upgraded seals and backup rings.



#### UPGRADE TO SOLID ROLLERS

Heavy duty machined from solid plastic rollers.

#### ADD AIR TOOL KIT

**BEND RESTRICTOR:** Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, and tearing. Available for low pressure models.

**QUICK DISCONNECT:** Quick disconnect couplings tread onto end of hose fitting to provide fast, leak-proof connections for low pressure hose lines.

#### ADD BEND RESTRICTOR

Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, and tearing. Available for low pressure models.



**COXREELS® SH Series "Super Hub™" spring driven hose reels, like the P Series, have a long history of dependable performance.** The larger chassis and frame accommodate longer lengths and larger diameters of hose. Coxreels' original Super Hub™ dual axle support system increases the stability during operation, reduces vibration and strengthens the structural integrity of the reel.

## SH, MP & HP SERIES

Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	EZ-COIL MODELS	MODEL	APRX. LBS.	
<b>LOW PRESSURE</b> Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.									
SH-N-350	3/8"	5/8"	50	300	50	EZ-SH-350	SHL-N-350	44	1
SH-N-375	3/8"	5/8"	75	300	68	EZ-SH-375	SHL-N-375	59	2
SH-N-3100	3/8"	5/8"	100	300	71	EZ-SH-3100	SHL-N-3100	60	2
SH-N-450	1/2"	3/4"	50	300	54	EZ-SH-450	SHL-N-450	46	1
SH-N-475	1/2"	3/4"	75	300	68	EZ-SH-475	SHL-N-475	57	3
SH-N-4100	1/2"	3/4"	100	300	81	EZ-SH-4100	SHL-N-4100	66	3
SH-N-525	3/4"	1 1/16"	25	300	52	EZ-SH-525	SHL-N-525	45	4
SH-N-550	3/4"	1 1/16"	50	300	69	EZ-SH-550	SHL-N-550	56	5
<b>MEDIUM PRESSURE</b> Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum Temperature 250°F.									
MP-N-350	3/8"	1 1/16"	50	3,000	65	EZ-MP-350	MPL-N-350	53	1
MP-N-450	1/2"	1 3/16"	50	2,500	67	EZ-MP-450	MPL-N-450	53	6
MP-N-525	3/4"	1 1/16"	25	1,500	61	-	MPL-N-525	51	4
MP-N-535	3/4"	1 1/16"	35	1,500	68	-	MPL-N-535	54	4
<b>HIGH PRESSURE</b> Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum Temperature 250°F.									
HP-N-150	1/4"	9/16"	50	5,000	64	EZ-HP-150	HPL-N-150	53	6
HP-N-350	3/8"	1 1/16"	50	4,000	65	EZ-HP-350	HPL-N-350	53	7


To order EZ-Coil® equipped models less hose, please add prefix "EZ-"

## REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	8 1/4"	21 1/4"	19 1/2"	6"	6"	4"	5"
2	8 1/4"	25 1/2"	24"	6"	6"	4"	5"
3	8 3/4"	25 1/2"	24"	6"	6"	4"	5"
4	9 3/8"	21 1/4"	19 1/2"	6"	6"	4"	5"
5	9 7/8"	25 1/2"	24"	6"	6"	4"	5"
6	8 3/4"	21 1/4"	19 1/2"	6"	6"	4"	5"
7	9 1/4"	21 1/4"	19 1/2"	6"	6"	4"	5"

Overall Dimensions      Base      Mounting Pattern



## TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 14 FOR ADDITIONAL ACCESSORIES



### ORDER EZ-COIL® MODELS

EZ-Coil® is a patented controlled retraction technology offered exclusively on Coxreels' Safety Series reels. It retracts up to 80% slower than conventional reels, resulting in workplace safety, protection from injury & costly property damage.

### UPGRADE TO NITRILE OR RUBBER HOSE

**NITRILE HOSE:** Premium high quality, oil resistant, multi-purpose hose. The high tensile spiral synthetic yarn reinforcement provides excellent kink resistance. Temperature range: -20° F to +212° F.

**SYNTHETIC RUBBER HOSE:** Versatile general purpose hose. The synthetic rubber tube and cover resists heat, sunlight, ozone, and weathering. Temperature range -40° F to +212° F

### UPGRADE TO STAINLESS STEEL SWIVEL

Based on the upgraded medium pressure swivel, the stainless steel swivel is machined from solid 316 stainless steel and features increased wall thicknesses with upgraded seals and backup rings.



### UPGRADE TO SOLID ROLLERS

Heavy duty machined from solid plastic rollers.

### ADD AIR TOOL KIT

**BEND RESTRICTOR:** Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, and tearing. Available for low pressure models.

**QUICK DISCONNECT:** Quick disconnect couplings tread onto end of hose fitting to provide fast, leak-proof connections for low pressure hose lines.

### ADD BEND RESTRICTOR

Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, and tearing. Available for low pressure models.



Double axle support with Super Hub™

## SH, MP & HP SERIES - REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Sturdy single pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation • Controlled retraction speed up to 80% slower on EZ-COIL models
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length



**WARNING:** Cancer and reproductive Harm – See [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov) for more information

1/4" - 1" I.D.

# T SERIES

## SUPREME DUTY HOSE REELS



Triple axle support with a full frame & Super Hub™

**COXREELS® T Series "Truck Mount" spring driven hose reels are the toughest hose reels in the spring driven line.** The extra large chassis with dual pedestal-style arms and Coxreels' Super Hub™ provides triple axle support while reducing vibration and strengthening the structural integrity of the reel. Making it perfect for on and off-road applications that demand reliability in the most abusive and demanding environments.

### T SERIES

Do not exceed listed hose O.D. to obtain maximum length.

HOSE								LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	EZ-COIL MODELS	MODEL	APRX. LBS.		
<b>LOW PRESSURE</b> Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.										
TSH-N-350	3/8"	5/8"	50	300	61	EZ-TSH-350	TSHL-N-350	55	1	
TSH-N-375	3/8"	5/8"	75	300	82	EZ-TSH-375	TSHL-N-375	73	2	
TSH-N-3100	3/8"	5/8"	100	300	85	EZ-TSH-3100	TSHL-N-3100	74	2	
TSH-N-450	1/2"	3/4"	50	300	63	EZ-TSH-450	TSHL-N-450	55	1	
TSH-N-475	1/2"	3/4"	75	300	82	EZ-TSH-475	TSHL-N-475	71	2	
TSH-N-4100	1/2"	3/4"	100	300	95	EZ-TSH-4100	TSHL-N-4100	80	2	
TSH-N-550	3/4"	1 1/16"	50	300	83	EZ-TSH-550	TSHL-N-550	70	3	
TSH-N-575	3/4"	1 1/16"	75	300	93	-	TSHL-N-575	73	4	
TSH-N-650	1"	1 1/2"	50	300	98	-	TSHL-N-650	77	4	
<b>MEDIUM PRESSURE</b> Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum Temperature 250°F.										
TMP-N-350	3/8"	1 1/16"	50	3,000	74	EZ-TMP-350	TMPL-N-350	61	1	
TMP-N-375	3/8"	1 1/16"	75	3,000	99	EZ-TMP-375	TMPL-N-375	80	2	
TMP-N-3100	3/8"	1 1/16"	100	3,000	106	-	TMPL-N-3100	82	2	
TMP-N-450	1/2"	1 3/16"	50	2,500	77	EZ-TMP-450	TMPL-N-450	64	1	
TMP-N-475	1/2"	1 3/16"	75	2,500	100	EZ-TMP-475	TMPL-N-475	80	2	
TMP-N-4100	1/2"	1 3/16"	100	2,500	106	-	TMPL-N-4100	80	2	
TMP-N-550	3/4"	1 1/16"	50	1,500	94	EZ-TMP-550	TMPL-N-550	74	3	
TMP-N-575	3/4"	1 1/16"	75	1,500	100	-	TMPL-N-575	77	5	
TMP-N-650	1"	1 3/8"	50	1,250	116	-	TMPL-N-650	81	5	
<b>HIGH PRESSURE</b> Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum Temperature 250°F.										
THP-N-150	1/4"	9/16"	50	5,000	74	EZ-THP-150	THPL-N-150	62	1	
THP-N-175	1/4"	9/16"	75	5,000	88	EZ-THP-175	THPL-N-175	71	2	
THP-N-1100	1/4"	9/16"	100	5,000	104	EZ-THP-1100	THPL-N-1100	82	2	
THP-N-350	3/8"	1 1/16"	50	4,000	78	EZ-THP-350	THPL-N-350	66	1	
THP-N-375	3/8"	1 1/16"	75	4,000	98	EZ-THP-375	THPL-N-375	80	2	

To order EZ-Coil® equipped models less hose, please add prefix "EZ-"

### T SERIES: REEL SPECIFICATIONS

#### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Electroless nickel plated steel swivel on 1" models

#### DESIGN & STRUCTURE

- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ triple axle support system
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Stainless Steel rollers on 3/4" & 1" models
- Solid one piece, heavy gauge 1/4" steel base & support posts for maximum strength
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Controlled retraction speed up to 80% slower on EZ-COIL models
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length


**WARNING:** Cancer and reproductive Harm – See [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov) for more information

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	9 3/8"	21 1/4"	19 1/2"	8"	9"	7"	8"
2	9 3/8"	25 1/2"	24"	8"	9"	7"	8"
3	9 7/8"	25 1/2"	24"	8"	9"	7"	8"
4	12"	25 1/2"	24"	8"	9"	7"	8"
5	12 1/2"	25 1/2"	24"	8"	9"	7"	8"

Overall Dimensions      Base      Mounting Pattern



### TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 14 FOR ADDITIONAL ACCESSORIES



#### ORDER EZ-COIL® MODELS

EZ-Coil® is a patented controlled retraction technology offered exclusively on Coxreels' Safety Series reels. It retracts up to 80% slower than conventional reels, resulting in workplace safety, protection from injury & costly property damage.

#### UPGRADE TO NITRILE OR RUBBER HOSE

**NITRILE HOSE:** Premium high quality, oil resistant, multi-purpose hose. The high tensile spiral synthetic yarn reinforcement provides excellent kink resistance. Temperature range: -20° F to +212° F.

**SYNTHETIC RUBBER HOSE:** Versatile general purpose hose. The synthetic rubber tube and cover resists heat, sunlight, ozone, and weathering. Temperature range -40° F to +212° F

#### UPGRADE TO STAINLESS STEEL SWIVEL

Based on the upgraded medium pressure swivel, the stainless steel swivel is machined from solid 316 stainless steel and features increased wall thicknesses with upgraded seals and backup rings.



#### UPGRADE TO SOLID ROLLERS

Heavy duty machined from solid plastic rollers. Only for T Series models 3/8" and 1/2".

#### ADD AIR TOOL KIT

**BEND RESTRICTOR:** Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, and tearing. Available for low pressure models.

**QUICK DISCONNECT:** Quick disconnect couplings tread onto end of hose fitting to provide fast, leak-proof connections for low pressure hose lines.

#### ADD BEND RESTRICTOR

Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, and tearing. Available for low pressure models









**COXREELS® C Series** "Combination" spring driven hose reels are a combination of two hose reels in one compact assembly. They are perfect for applications in which two sources are needed to get the job done when space is a critical factor. The single mounting base creates stability and adds to the convenience of one mounting pattern. This series is available in dual hose combinations and in air hose/electrical cord combinations.

## C SERIES

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>LOW PRESSURE</b> Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.								
<b>C-LP-125-125</b>	1/4"	1/2"	25	300	66	<b>C-LPL-125-125</b>	60	<b>1</b>
<b>C-LP-135-135</b>	1/4"	1/2"	35	300	67	<b>C-LPL-135-135</b>	60	<b>1</b>
<b>C-LP-150-150</b>	1/4"	1/2"	50	300	74	<b>C-LPL-150-150</b>	64	<b>1</b>
<b>C-LP-325-325</b>	3/8"	5/8"	25	300	67	<b>C-LPL-325-325</b>	60	<b>2</b>
<b>C-LP-335-335</b>	3/8"	5/8"	35	300	69	<b>C-LPL-335-335</b>	60	<b>2</b>
<b>C-LP-350-350</b>	3/8"	5/8"	50	300	78	<b>C-LPL-350-350</b>	64	<b>2</b>
<b>C-LP-425-425</b>	1/2"	3/4"	25	300	70	<b>C-LPL-425-425</b>	60	<b>2</b>



UL Listed† :: Accessories only

### C SERIES :: REEL SPECIFICATIONS

#### SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets
- Swivel Seals: NITRILE

#### DESIGN & STRUCTURE


- Compact two reel assembly for dual hose applications, each reel operates independently
- Guide arm adjusts to wall, floor & overhead positions
- Single expanded, 1/4" steel mounting base for increased stability & space efficiency
- One mounting pattern allow 1/2 the installation time required to install 2 reels at one station
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
<b>1</b>	10 1/2"	18 5/8"	17"	8"	9"	7" Mounting Pattern	8"
<b>2</b>	11 1/2"	18 5/8"	17"	8"	9"	7"	8"


Overall Dimensions Base

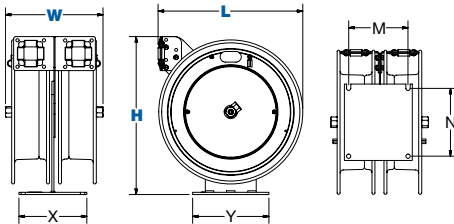

**WARNING:** Cancer and reproductive Harm – See page 15 for more information – [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

## TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 14 FOR ADDITIONAL ACCESSORIES



#### UPGRADE TO SOLID ROLLERS

Heavy duty machined from solid plastic rollers.

#### UPGRADE TO NITRILE OR RUBBER HOSE

**NITRILE HOSE:** Premium high quality, oil resistant, multi-purpose hose. The high tensile spiral synthetic yarn reinforcement provides excellent kink resistance. Temperature range: -20° F to +212° F.

**SYNTHETIC RUBBER HOSE:** Versatile general purpose hose. The synthetic rubber tube and cover resists heat, sunlight, ozone, and weathering. Temperature range -40° F to +212° F.



#### ADD BEND RESTRICTOR

Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, and tearing.




# PC SERIES

## POWER CORD REELS



**COXREELS® PC Series** spring driven "Power Cord" reels are heavy duty, industrial grade power sources. They replace tangled extension cords and self-retract to increase safety, productivity and efficiency. Modeled after the P and SH Series, the PC Series are designed for long-lasting, trouble-free performance even under the most demanding conditions.

### PC SERIES



		CORD							EZ-COIL MODELS	SIZE INDEX
MODEL	ACCESSORY	INLET / OUTLET	AWG / NO COND.	CORD FT.	TYPE	VOLTS	AMPS	APPR. LBS.		
<b>FOR INDOOR USE ONLY!</b> All models rated at 115 volts, 60 hz single phase only.										
PC13-3516-A†	Single Industrial Receptacle†	⊕	16 / 3	35	SJO	115	13	34	-	1
PC13-5016-A†		⊕	16 / 3	50	SJO	115	13	36	EZ-PC13-5016-A	1
PC24-0016-A†		⊕	16 / 3	100	SJO	115	13	73	EZ-PC24-0016-A	4
PC13-3512-A†	Single Industrial Receptacle†	⊕	12 / 3	35	SJO	115	20	37	-	1
PC13-5012-A†		⊕	12 / 3	50	SJO	115	20	40	EZ-PC13-5012-A	1
PC24-0012-A†		⊕	12 / 3	100	SJO	115	20	81	EZ-PC24-0012-A	4
PC13-3512-B†	Quad "4 Plug" Industrial Receptacle†	⊕	12 / 3	35	SJO	115	20	38	-	1
PC13-5012-B†		⊕	12 / 3	50	SJO	115	20	41	EZ-PC13-5012-B	1
PC24-0012-B†		⊕	12 / 3	100	SJO	115	20	84	EZ-PC24-0012-B	4
PC13-3516-F†	Duplex G.F.C.I. Metal Industrial Receptacle†	⊕	16 / 3	35	SJO	115	13	36	-	1
PC13-5016-F†		⊕	16 / 3	50	SJO	115	13	38	EZ-PC13-5016-F	1
PC24-0016-F†		⊕	16 / 3	100	SJO	115	13	73	EZ-PC24-0016-F	4
PC13-3512-F†		⊕	12 / 3	35	SJO	115	20	39	-	1
PC13-5012-F†		⊕	12 / 3	50	SJO	115	20	42	EZ-PC13-5012-F	1
PC24-0012-F†		⊕	12 / 3	100	SJO	115	20	83	EZ-PC24-0012-F	4
PC24-0016-X	With Cord, Less Accessory	⊕	16 / 3	100**	SJO	115	13	71	EZ-PC24-0016-X	4
PC13-5012-X††		⊕	12 / 3	50**	SJO	115	20	40	EZ-PC13-5012-X	1
PC24-0012-X		⊕	12 / 3	100**	SJO	115	20	81	EZ-PC24-0012-X	4
PC13-3516-4	With Cord, Less Accessory		16 / 4	35	SJO	115	10	34	-	1
PC13-5016-4			16 / 4	50	SJO	115	10	36	-	1
PC24-0016-4			16 / 4	100	SJO	115	10	74	-	4
PC13-3512-4			12 / 4	35	SJO	115	20	31	-	1
PC13-5012-4			12 / 4	50	SJO	115	20	40	EZ-PC13-5012-4	1
PC24-0012-4			12 / 4	100	SJO	115	20	85	-	4
PC13L-5016††	Less Cord, Less Accessory		16 / 3	50*	SJO	115	25	31	EZ-PC13L-5016	1
PC24L-0016			16 / 3	100	SJO	115	25	62	EZ-PC24L-0016	4
PC13L-5012††			12 / 3	50	SJO	115	25	29	EZ-PC13L-5012	1
PC24L-0012			12 / 3	100	SJO	115	25	64	EZ-PC24L-0012	4
PC13L-5016-4	Less Cord, Less Accessory		16 / 4	50	SJO	115	25	31	-	1
PC24L-0016-4			16 / 4	100	SJO	115	25	62	-	4
PC13L-5012-4			12 / 4	50	SJO	115	25	29	-	1
PC24L-0012-4			12 / 4	100	SJO	115	25	64	-	4

### PC SERIES REEL SPECIFICATIONS

#### SLIP RING

- External heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 25AMP / 600V rated slip ring (35AMP on select models)
- Include 5' lead cable & grounding plug (except on less cord models)

#### DESIGN & STRUCTURE

- Single pedestal cord reel with space saving design facilitates workplace organization
- Guide arm adjusts to wall, floor & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- Coxreels' exclusive Super Hub™ dual axle support system on models with size index #3 & #4
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Controlled retraction speed up to 80% slower on EZ-COIL models
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures cord at desired length


**!** WARNING: Cancer and reproductive Harm – See [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov) for more information

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	8 1/2"	14 7/8"	13 1/2"	5"	6"	3"	5"
2	11"	18 5/8"	17"	6"	6"	4"	5"
3	10 1/8"	21"	19 1/2"	6"	6"	4"	5"
4	10 1/4"	25 1/2"	24"	6"	6"	4"	5"

Overall Dimensions      Base      Mounting Pattern



### TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 14 FOR ADDITIONAL ACCESSORIES



#### ORDER EZ-COIL® MODELS

EZ-Coil® is a patented controlled retraction technology offered exclusively on Coxreels' Safety Series reels. It retracts up to 80% slower than conventional reels, resulting in workplace safety, protection from injury & costly property damage.



#### UPGRADE TO SOLID ROLLERS

Heavy duty machined from solid plastic rollers.



# POWER LIGHT REELS PC SERIES

10GA - 16GA

**COXREELS® PC Series** spring driven "Power Cord" reels are heavy duty, industrial grade power sources. They replace tangled extension cords and self-retract to increase safety, productivity and efficiency. Modeled after the P and SH Series, the PC Series are designed for long-lasting, trouble-free performance even under the most demanding conditions.

## PC SERIES

		CORD							EZ-COIL MODELS	SIZE INDEX
MODEL	ACCESSORY	INLET OUTLET	AWG / NO COND.	CORD FT.	TYPE	VOLTS	AMPS	APRX. LBS.		
<b>FOR INDOOR USE ONLY!</b> All models rated at 115 volts, 60 hz single phase only.										
PC13-3516-E†	Caged Drop Light with Tool Tap Plug	⊕	16 / 3	35	SJTO	115	13	34	-	1
PC13-5016-E†		⊕	16 / 3	50	SJTO	115	13	36	EZ-PC13-5016-E	1
PC19-7516-E†			16 / 3	75	SJTO	115	13	60	-	2
PC24-0016-E†			⊕	16 / 3	100	SJTO	115	13	73	EZ-PC24-0016-E
PC13-3516-H†	Industrial Duty LED Light†	⊕	16 / 3	35	SJTO	115	.17	35	-	1
PC13-5016-H†			16 / 3	50	SJTO	115	.17	37	EZ-PC13-5016-H	1
PC24-0016-H			16 / 3	100	SJTO	115	.17	70	EZ-PC24-0016-H	3
PC13-3516-K	Super-Bright LED Light with Tool Tap on Handle	⊕	16 / 3	35	SJTO	115	.17	35	-	1
PC13-5016-K		⊕	16 / 3	50	SJTO	115	.17	37	EZ-PC13-5016-K	1
PC13-3516-M			Compact Super-Bright LED Light	⊕	16 / 3	35	SJTO	115	.17	35
PC13-5016-M		⊕	16 / 3		50	SJTO	115	.17	37	EZ-PC13-5016-M



UL Listed †

UL Listed ††

### PC SERIES :: REEL SPECIFICATIONS

#### SLIP RING

- External heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 25AMP / 600V rated slip ring (35AMP on select models)
- Include 5' lead cable & grounding plug (except on less cord models)

#### DESIGN & STRUCTURE

- Single pedestal cord reel with space saving design facilitates workplace organization
- Guide arm adjusts to wall, floor & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- Coxreels' exclusive Super Hub™ dual axle support system on models with size index #3 & #4
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Controlled retraction speed up to 80% slower on EZ-COIL models
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures cord at desired length



**WARNING:** Cancer and reproductive Harm – See [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov) for more information

SPRING DRIVEN


EZ-COIL®

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	8 1/2"	14 7/8"	13 1/2"	5"	6"	3"	5"
2	11"	18 5/8"	17"	6"	6"	4"	5"
3	10 1/8"	21"	19 1/2"	6"	6"	4"	5"
4	10 1/4"	25 1/2"	24"	6"	6"	4"	5"

Overall Dimensions      Base      Mounting Pattern



## TOP REQUESTED UPGRADES & ACCESSORIES

SEE PAGE 14 FOR ADDITIONAL ACCESSORIES



### ORDER EZ-COIL® MODELS

EZ-Coil® is a patented controlled retraction technology offered exclusively on Coxreels' Safety Series reels. It retracts up to 80% slower than conventional reels, resulting in workplace safety, protection from injury & costly property damage.



### UPGRADE TO SOLID ROLLERS

Heavy duty machined from solid plastic rollers.






**COXREELS®** MPD, TDMP and 1275HP Series "Dual Hydraulic" hose reels have similar features to their related series, but have been redesigned to handle dual hydraulic applications. Choose between spring driven retraction at 3,000 PSI to 50 feet and hand crank or motorized models at 10,000 PSI to 200 feet.

## SPRING DRIVEN DUAL HYDRAULIC SERIES

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>MPD SERIES</b> Medium pressure reels are furnished standard with dual-hydraulic hose banded together every 2-3 feet with power strip-type clamps. Maximum temperature 212° F.								
-	-	-	-	-	-	<b>MPDL-N-150</b>	62	<b>1</b>
<b>MPD-N-330</b>	3/8"	1 1/16"	30	3,000	78	<b>MPDL-N-330</b>	62	<b>1</b>
<b>MPD-N-430</b>	1/2"	1 3/16"	30	2,500	79	<b>MPDL-N-430</b>	62	<b>1</b>
<b>TDMP SERIES</b> Medium pressure reels are furnished standard with dual-hydraulic hose banded together every 2-3 feet with power strip-type clamps. Maximum temperature 212° F.								
<b>TDMP-N-350</b>	3/8"	1 1/16"	50	3,000	104	<b>TDMP-L-N-350</b>	79	<b>2</b>
<b>TDMP-N-450</b>	1/2"	1 3/16"	50	2,500	106	<b>TDMP-L-N-450</b>	79	<b>2</b>

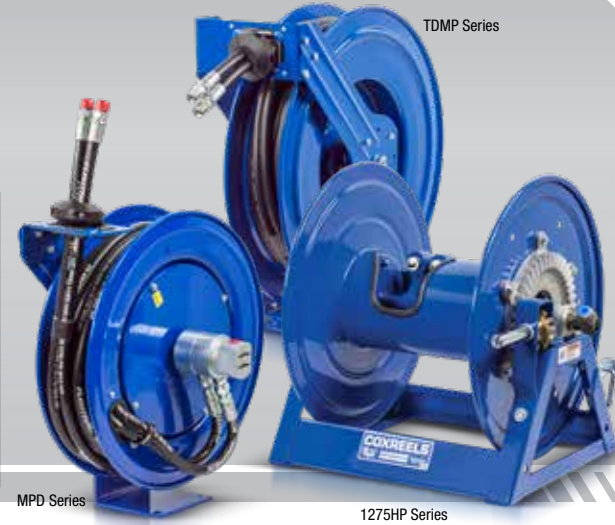

## HAND CRANK DUAL HYDRAULIC SERIES

LESS HOSE							SIZE INDEX	
MODEL	DESCRIPTION	INLET	OUTLET	CAPACITY 1/4" I.D.	CAPACITY 3/8" I.D.	PSI		APRX. LBS.
<b>1125HP SERIES</b> 10,000 psi - two 1/4" 90° inlets. These reels are an essential component to operate hydraulic tools requiring 10,000 psi can be easily managed safely for efficient use in emergency situations.								
<b>1275HPL-4-8</b>	Rim Rewind	1/4"	1/2"	135'	85'	10,000*	37	<b>3</b>
<b>1275HPL-4-8-C</b>	Geared Crank	1/4"	1/2"	135'	85'	10,000*	43	<b>3</b>
<b>1275HPL-4-8-A</b>	Air Motor	1/4"	1/2"	135'	85'	10,000*	50	<b>3</b>
<b>1275HPL-4-8-E</b>	Electric Motor	1/4"	1/2"	135'	85'	10,000*	68	<b>3</b>
<b>1275HPL-4-12</b>	Rim Rewind	1/4"	1/2"	200'	125'	10,000*	39	<b>4</b>
<b>1275HPL-4-12-C</b>	Geared Crank	1/4"	1/2"	200'	125'	10,000*	45	<b>4</b>
<b>1275HPL-4-12-A</b>	Air Motor	1/4"	1/2"	200'	125'	10,000*	52	<b>4</b>
<b>1275HPL-4-12-E</b>	Electric Motor	1/4"	1/2"	200'	125'	10,000*	70	<b>4</b>

### SUFFIX "4" OUTLET/ADAPTER OPTIONS

The option "4" is standard but can be adapted for your specific need.

Simply replace "4" with an "A, B, C or D" option:

**A** = -4 JIC Male - # **7818**

**B** = -5 JIC Male # **7817** & 1/2" x 3/8" Reducer - # **7540**

**C** = 1/4" BSP Female - # **7821**


**D** = M14 X 1.5 Female - # **7848**

\*Use of non-standard outlet/adapter options may reduce typical working pressure safety.

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W			H		L	X	Y		M	N	Ø	Dw
	CRANK / SPRING	ELEC.	AIR	CRANK / SPRING	ELEC.			CRANK / SPRING	ELEC.				
<b>1</b>	11 1/2"	-	-	21 1/8"	-	19 1/2"	6"	6"	-	4"	5"	-	-
<b>2</b>	11 5/8"	-	-	25 1/2"	-	24"	8"	9"	-	7"	8"	-	-
<b>3</b>	17 1/2"	20 1/4"	19 1/4"	18 5/8"	19 1/8"	17 5/8"	13 3/8"	15 3/8"	16"	11 7/16"	10"	6 1/4"	8"
<b>4</b>	21 1/2"	24 1/4"	23 1/4"	18 5/8"	19 1/8"	17 5/8"	17 3/8"	15 3/8"	16"	15 7/16"	10"	6 1/4"	12"

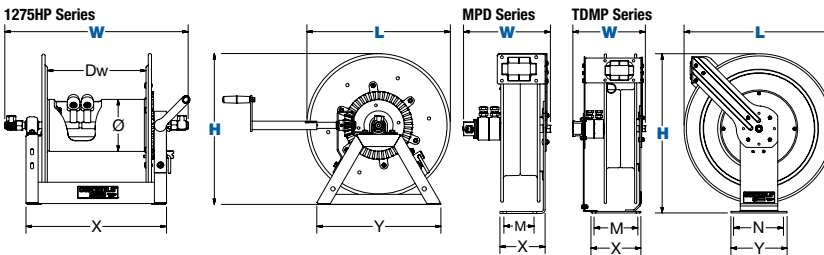

## MPD, TDMP & 1275HP SERIES :: REEL SPECIFICATIONS

### MPD SERIES

- External fluid path with dual port melanized 90° full-flow NPT swivel inlet
- Swivel Seals: TEFLON
- Sturdy single pedestal design with Coxreels' exclusive Super Hub™ dual axle support system
- One-sided supply/return hookup
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures cable at desired length

### TDMP SERIES

- External fluid path with dual port melanized 90° full-flow NPT swivel inlet
- Swivel Seals: TEFLON
- Sturdy dual pedestal design with Coxreels' exclusive Super Hub™ triple axle support system
- One-sided supply/return hookup
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures cable at desired length

### 1275 SERIES

- Two high pressure 90° full-flow melanized steel 1/4" swivel inlets
- Swivel Seals: VITON®
- Designed for dual hydraulic emergency rescue systems & other high pressure hydraulic tools
- Sturdy all welded steel "A" frame, not bolted to strengthen the reel structure
- Two low profile outlet risers & open drum slot design for flat smooth hose wrap (must specify the type of outlets, see outlet options)



WARNING: Cancer and reproductive Harm – See [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov) for more information

# ACCESSORIES

## SWIVELS & O-RING COMPATIBILITY CHART

	Brass	Zinc Plated Steel	Electroless Nickel Plated Steel	Stainless Steel	In-Line Nickel Plated Steel or Stainless Steel	Melonized Steel
<b>Available Swivel I.D.</b>  Female NPT fittings (*BSPT fittings available)	1/4"	•	•			•
	3/8"	•	•		•	
	1/2"	•	•		•	
	3/4"	•	•		•	
	1"			•	•	
	1 1/2"			•	•	•
<b>Available Swivel Seals</b>  (Refer to O-Ring Compatibility Chart for desired application)	Buna	•	•	•	•	
	EPDM	•	•	•	•	
	Viton®	•	•	•	•	•
	AFLAS			•	•	

### O-RING COMPATIBILITY CHART

Intended as a general guideline only. Users must test under their own operating guidelines to determine suitability. Please consult factory if your application is not listed.

1 = Recommended | 2 = Fair | 3 = Poor | 4 = Unsatisfactory

	ACETYLENE	AIR (-30°F TO +25°F)	AIR (+25°F TO 200°F)	AIR (200°F TO 300°F)	AIR (300°F TO 400°F)	ANTIFREEZE	FUEL OIL / KEROSENE	GREASE (PETROLEUM BASED)	HYDROCHLORIC ACID	MOTOR OIL (PETROLEUM BASED)	NATURAL GAS	NITROGEN	OXYGEN (200°F TO 300°F)	OXYGEN (COLD)	PESTICIDES	STEAM (BELOW 300°F)	STEAM (300°F TO 400°F)	SEWAGE	SEA WATER	WATER (UP TO 200°F)
→	1	1	1	3	4	2	1	1	3	1	1	1	4	2	2	4	4	1	1	1
→	1	1	1	2	4	1	4	4	2	4	4	1	4	2	4	1	2	1	1	1
→	1	2	1	1	1	2	1	1	1	1	1	2	1	1	1	2	3	2	2	2
→	1	3	1	1	1	1	2	2	1	2	1	1	4	2	1	2	3	1	1	1



#### Brass Swivels

CNC machined from solid brass swivels are built for general multi-purpose applications. Configured in a 90 degree fluid path with full flow designed. Working pressure up to 3,000 PSI & -40°F to 400°F\*.



#### Zinc Plated Steel Swivels

Machined from strong low carbon steel & configured in a 90 degree fluid path with full flow designed. Zinc plated steel swivels are recommended for non-corrosive applications. Working pressure up to 5,000 PSI & -40°F to 400°F\*.



#### Electroless Nickel Plated Steel Swivels

Machined from strong low carbon steel & configured in a 90 degree fluid path with full flow designed. Nickel plated steel swivels are recommended for mildly corrosive applications. Working pressure up to 4,000 PSI & -40°F to 400°F\*.



#### Stainless Steel Swivels

Machined from high quality, pure 316 stainless steel & configured in a 90 degree fluid path with full flow design. Stainless steel swivels offer superior corrosion protection. Working pressure up to 5,000 PSI & -40°F to 400°F\*.



#### In-line Swivels

Nickel plated steel or stainless steel swivel configured in an in-line fluid path with full flow design. Working pressure up to 1,500 PSI for 1 1/2" I.D. & 1,000 PSI for 2" I.D. -40°F to 400°F\*.



#### Melonized Steel Swivels

Configured in a 90 degree fluid path with 1/4" ports, melonized steel swivels are used for hydraulic applications. Working pressure up to 10,000 PSI & -5°F to 400°F\*.

\*Temperature rating depends on the seal type selected

### MOUNTING & ROLLER BRACKETS

	PART NO.	REEL SERIES					
		P	SH, MP & HP	T	PC	P-W & SHW	P-WC
<p><b>Swing Bracket</b> For vertical surface mounting, allows reel to swing 180°. Powder coated crinkle black 1/4" steel. Weight: 5 lbs.</p>	15720	•	•		•	•	•
	15725			•			
<p><b>Swivel Bracket</b> For horizontal surface mounting, ball bearing rotation, allows reel to swivel 345°. Powder coated crinkle black heavy gauge steel. Weight: 6 lbs. NOT FOR USE IN CEILING APPLICATIONS.</p>	15721	•	•	•	•	•	•
	15723	•	•	•	•	•	•
<p><b>EZ-Up Bracket</b> Reel easily slides in &amp; out for easy overhead mounting. Use as an alternative to the #MR-1. Must be ordered with #15724 for "I" or "H" beam installations. Weight: 6.5 lbs.</p>	15723	•	•	•	•	•	•
	15724	•	•	•	•	•	•
<p><b>EZ-Up "I" or "H" Beam Adapter</b> Must be ordered with #15723. Powder coated crinkle black, all steel construction. Weight: 5 lbs.</p>	15724	•	•	•	•	•	•
	MR-1	•	•		•	•	•
<p><b>Mounting Bracket</b> For overhead mounting, fits 3" to 8 1/2" flange on "I" or "H" beam. Powder coated crinkle black 3/16" bent steel. Weight: 13 lbs.</p>	MRT-1			•			
	4RB	•	•	•	•	•	•
<p><b>4-Way Roller Bracket</b> Heavy gauge steel, powder coated Coxreels blue (4RB) Available in stainless steel (4RB-SS). Weight: 1 lbs.</p>	4RB-SS	•	•	•	•	•	•

### HOSE STOPS & GUARDS



HOSE STOPS PART NO.	HOSE GUARD PART NO.	HOSE		CORD	OVERALL
		I.D.	O.D.		
131	237-1	1/4"	1/2"	12/3 SJO	2 1/2"
131-1	237-1	-	-	16/3 SJO	2 1/2"
131-3	237-1	3/8"	21/32"	10/3 SO	2 1/2"
131-4	398-1	1/2"	3/4"	-	2 1/2"
254	-	1/2"	3/4"	-	3 1/2"
430	398-1	3/4"	1"	-	3 1/2"
20214	-	1"	19/16"	-	5"

### PVC INLET HOSE ASSEMBLIES



PART NO.	FITTINGS	I.D.	LENGTH	PSI
5150-1.5	1/4" Male x Female NPT	1/4"	18"	300
5153-1.5	3/8" Male x Female NPT	3/8"	18"	300
5154-1.5	1/2" Male x Female NPT	1/2"	18"	300
5155-1.5	3/4" Male x Male NPT	3/4"	18"	300
5224-1.5	3/8" Male x Male NPT	3/8"	18"	3,000
5256-1.5	1/2" Male x Male NPT	1/2"	18"	2,500
5290-1.5	3/4" Male x Male NPT	3/4"	18"	1,500
5304-1.5	1/4" Male x Male NPT	1/4"	18"	5,000
5336-1.5	3/8" Male x Male NPT	3/8"	18"	4,000

### BEND RESTRICTORS



ADD SUFFIX	I.D.	DESCRIPTION	PSI
-BxB	1/4"	Black PVC Bend Restrictor	300
-BxB	3/8"	Black PVC Bend Restrictor	300
-BxB	1/2"	Black PVC Bend Restrictor	300

Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, & tearing.



WARNING: Cancer and reproductive Harm – See [www.PG5Warning.ca.gov](http://www.PG5Warning.ca.gov) for more information



# CUSTOMIZE YOUR REEL FROM CONCEPT TO COMPLETION










## CUSTOMIZE YOUR REEL WITH COXREELS CUSTOM PRODUCTS:

Our engineering capabilities and manufacturing processes allow us to design and build top quality products for any conceivable application where reels are needed.

- Customize fluid paths/axles or create custom brackets, mounts, and accessories.
- Integrate with your specific hardware, systems, or devices.
- Modify drums, add divider disks, manipulate openings, or integrate hose handling devices.
- Combine features of various reel model lines, creating your own hybrid reel.
- Create custom retraction systems.
- Increase temperature and pressure capabilities, or multiply fluid paths.
- The possibilities are only limited by your imagination!

### POWDER COAT OPTIONS\*

3 digit suffix for spring driven or 4 digit suffix for hand crank & motorized models.

			
-BXX or -BXXX Blue	-RXX or -RXXX Red	-GXX or -GXXX Gray	
			
-KXX or -KXXX Gloss Black	-CXX or -CXXX Crinkle Black	-WXX or -WXXX White	-NXX or -NXXX Green

\*Minimum quantity & or dollar amount may apply



## EZ-COIL®

### SAFETY REWIND SYSTEM

EZ-Coil® is a patented controlled retraction technology offered exclusively on Coxreels' Safety Series reels. EZ-Coil® retracts up to 80% slower than conventional reels, resulting in workplace safety, protection from injury & costly property damage.

**NOBODY SHOULD BE WITHOUT EZ-COIL®!**

<b>up to 80% Slower Retraction</b>	Conventional SPRING DRIVEN REELS	COXREELS' EZ-COIL	
	<b>SPEED</b>	25 ft./sec.	5 ft./sec.
	<b>WHIPPING</b>	5-15 ft.	1 ft.
	<b>IMPACT</b>	500 ft./lbs.	0-1 ft./lbs.

Based on an independent evaluation performed by COXREELS. Depending on certain conditions, results may vary.

## ! SAFETY FIRST !

### PLEASE REVIEW ALL SAFETY INFORMATION BEFORE CHOOSING AND USING ALL EQUIPMENT

SERIOUS INJURY, DEATH AND DESTRUCTION OF PROPERTY can result from improper selection or improper use of products described in this catalog. Since COXREELS has no control over the number and variety of applications for which its products may be purchased or the conditions under which they may be used, COXREELS liability on any claim, whether in contract, tort (including negligence), or otherwise, for any loss or damage shall in no case exceed the price paid for product or any part thereof which give rise to claim. However, the general information contained herein shall allow the customer to select and assume all responsibility for product acceptability and fitness for specific applications. As always, COXREELS technical assistance and support is available for your convenience.

**NOTE:** All designs, specifications, and dimensional data contained in this book are subject to change without notice. No additional warranties, express or implied, including warranties of merchantability for fitness for a particular purpose, are created by the descriptions and depictions of the products on in this book.

### ! PROP 65

In compliance of California's Proposition 65, Coxreels will be applying warning labels to all applicable products with regard to chemicals known to the state of California to cause cancer or reproductive harm.

All reels will carry the following warning.

Parts and components will carry warning labels relative to the respective materials used.

For more information see <http://www.coxreels.com/prop65.html>



**WARNING**  
This product can expose you to chemicals including nickel, which are known to the State of California to cause cancer, and chemicals including chromium, which are known to the State of California to cause birth defects or other reproductive harm.

► For more information: [www.P65Warnings.ca.gov/product](http://www.P65Warnings.ca.gov/product)





## INDUSTRY CATALOGS



## PRODUCT CATALOGS



**CORPORATE HEADQUARTERS:**

Tempe, Arizona USA

Phone: 480.820.6396 Fax: 480.820.5132

Toll Free: 800.COX.REEL Toll Free Fax: 800.229.REEL

[www.coxreels.com](http://www.coxreels.com) [info@coxreels.com](mailto:info@coxreels.com)



**INTERNATIONAL:**

EUROPE / MIDDLE EAST / AFRICA

Phone: +44 (0) 1536 464 990

Fax: +44 (0) 1536 464 999

[www.crireels.com](http://www.crireels.com) [sales@cireels.com](mailto:sales@cireels.com)



CATALOG: LT-CPTIC22

**POWER TRANSMISSION REELS INDUSTRY CATALOG**